Smart Em®

TROJAN DEVELOPMENTS

Emergency Exit Device with LED indication

This unit operates the same way as the standard Em Rex® (Emergency Exit Device) but it also offers the added feature of back lighting which allows both easy location and greater safety in emergencies involving areas of limited lighting.

It also operates from 10 to 30Vdc.

Installation:

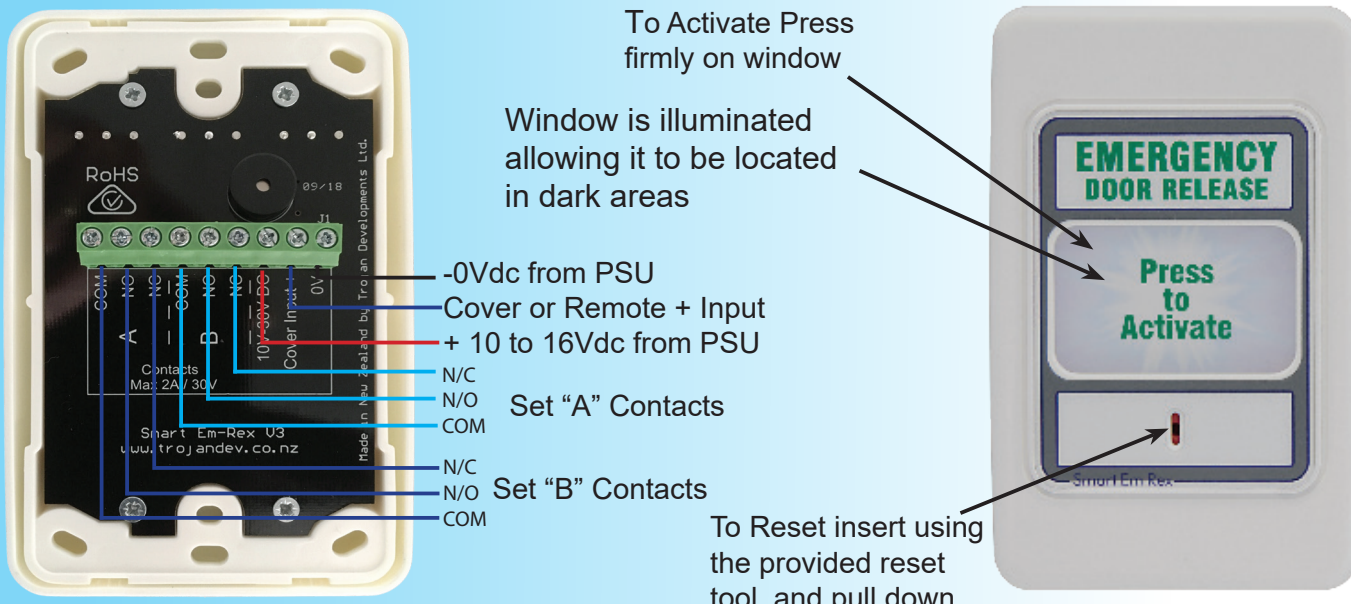

Specifications:

- Single gang profile fits standard electrical flush box
- Power requirements 10 to 30Vdc
- 10mA at 13.6 Vdc and 5mA at 27.2Vdc
- Two sets of clean N/C outputs (Open upon activation)
- The contacts are rated at 1 Amp 30Vdc
- Sounder and red bar indication of operation
- Back lighting of the "Press to Activate area
- Certified & complies with BS 5839 Pt 2. Standard for "Break-Glass Panels"

Product Code:

- Smart Em

www.trojandev.co.nz sales@trojandev.co.nz

NEW ZEALAND MADE

developing innovative egress solutions since 1987