

TDL-8FB

TROJAN
DEVELOPMENTS


Eight Way Fuse Board

The TDL-8FB is an 8 Way Fuse Board. It has 8 individual fused outputs. Each fuse has an associated LED to indicate that the fuse is operative. The LED illuminates green for normal positive 12Vdc operation and amber for AC voltages up to 24Vac.

Also designed to fit the TDL Mounting Base

Features:

- ▼ 8 separate fused outputs
- ▼ The fuses are field replaceable
- ▼ Maximum fuse rating 5 Amps
- ▼ Fits TDL-MB mounting base
- ▼ Modular unit that can be used to protect a number of devices
- ▼ Rising clamp type terminals will not damage cables and can accommodate up to a 2.5mm² (14AWG) cable
- ▼ Designed to be used as an interface between power supplies and field devices
- ▼ LEDs to indicate fuse status
- ▼ Can be used for the protection of 24Vac cameras

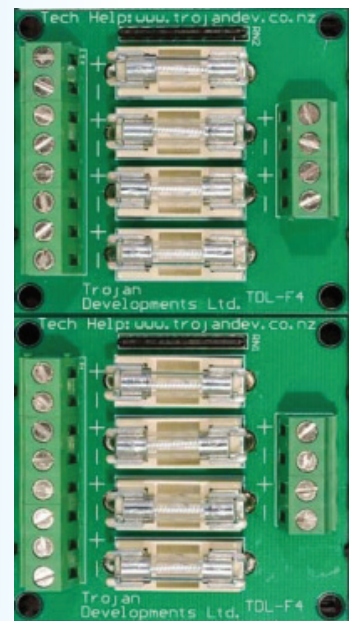

Specifications:

- ▼ 8-Way Fuse Board
- ▼ Fuse size: 20mm x 5mm
- ▼ Terminals for positive and negative outputs - the positive outputs
- ▼ Suitable for AC and DC power supplies
- ▼ Maximum supply current per 4-way fuse board is 20 Amps (40)
- ▼ Maximum output current is 5 Amps
- ▼ Dimensions: 110mm (w) x 60mm (h) x 23mm (d)

Product code:

- ▼ TDL-8FB

▼ www.trojandev.co.nz

▼ sales@trojandev.co.nz



developing innovative egress solutions since 1987